


- Now the silicone valve cover kit can be installed.



- Let the valve cover gasket rest for 30 minutes.
- Check if the holes of the vent pipes are open, if not open them with a small drill or tool.



- Inspect the edges of the cylinder block and check for flatness, especially at the corners of the front engine cover. If necessary, touch up with a utility knife or sandpaper.

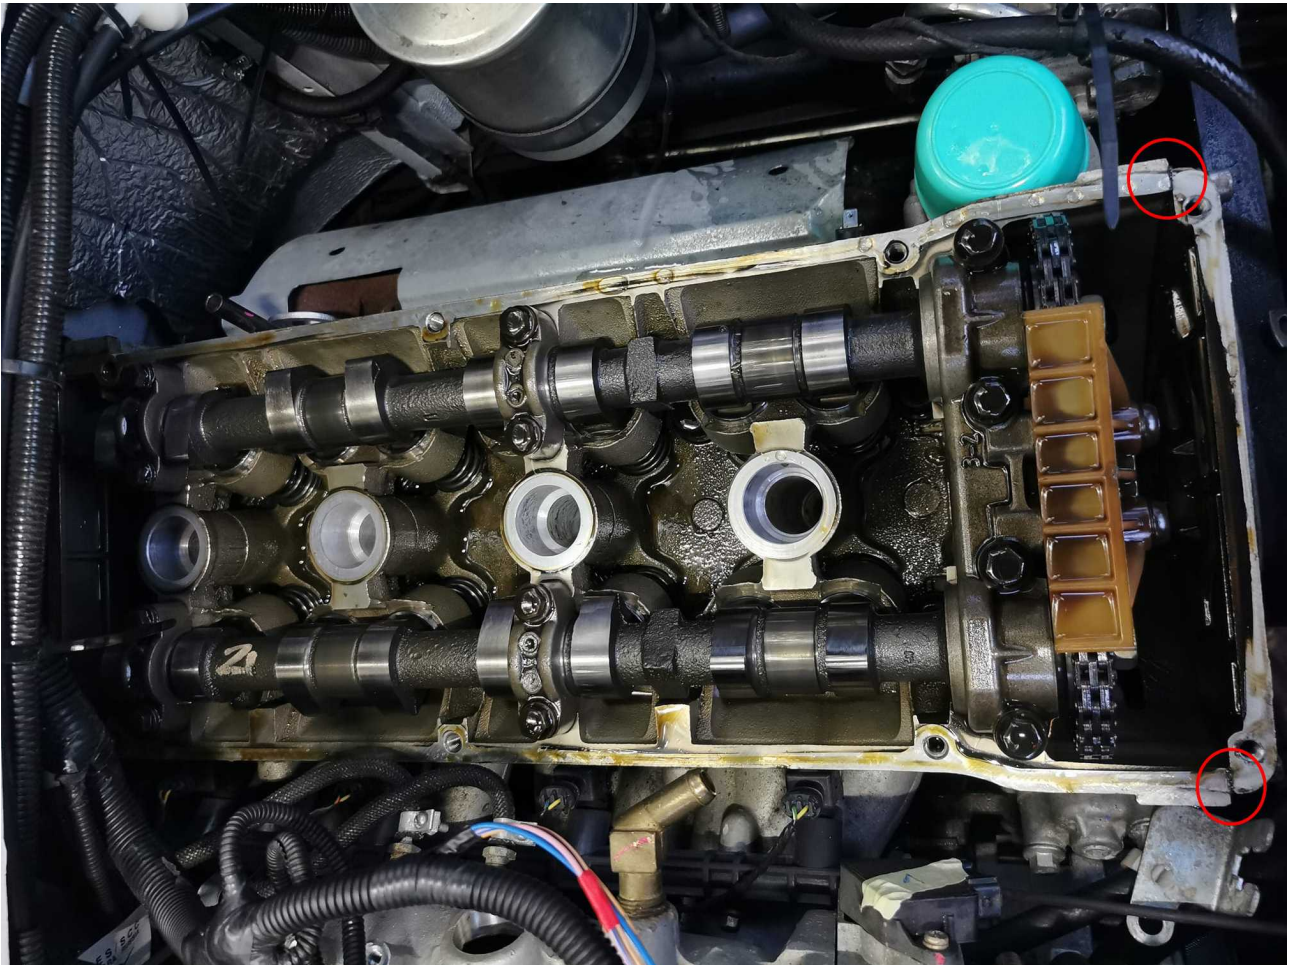

- Now install the valve cover and tighten the valve cover bolts with 3.6Nm when using a silicone gasket in order as below.



