APPLICATION FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE ACCORDING TO ECE REGULATION No. 30, 02 SERIES OF AMENDMENTS

1.	Manufacturer's name or trade mark(s) on the tyre type[2]	:	Bontyre III
2.	Tyre type designation by the manufacturer[2]	:	Stalker A/T
3.	Manufacturer's name and address	:	SHANDONG NEW CONTINENT TIRE CO.,LTD LUSHANPROJECTAREA,ECONOMIC DEVELOPMENTZONE,YISHUI,SHANDONG, CHINA
4.	If applicable, name and address of the manufacturer's representative	:	not applicable
5.	Summarized description		
5.1.	Tyre size designation	:	225/75R16
5.2.	Category of use	:	~~normal~~/snow/~~special use/temporary use~~
5.3.	Structure	:	~~diagonal/bias belted~~/radial/~~run flat tyre~~
5.4.	Speed category symbol		R
5.5.	Load-capacity index		108
6.	Overall dimensions	:	ETRTO/~~calculated/Annex 5~~
	overall section width	:	223
	outer diameter	:	744
7.	Factor 'x'	:	N.A.
8.	Rims on which the tyre can be mounted	:	6J
9.	Measuring rim and test rim	:	See attached test report
10.	State whether the tyre is	:	Tubeless / ~~tube type~~
11.	State whether the tyre is	:	~~Standard~~ / reinforced
12.	State if special use tyre	:	n.a.
	Professional Off-Road	:	~~Yes / no~~
	Tread depth	:	n.a.
	Void to fill ratio	:	n.a.
13.	Submitted for approval on (date)	:	August 16th, 2014

We herewith declare that we have not applied and will not apply for approval with another Contracting Party of the ECE for the same type of product.

MANUFACTURER'S STAMP

Signature : .....

Name: YaoRong

THIS APPLICATION IS ACCOMPANIED BY:

- A drawing of the tyre's side wall, tread and dimensioned cross section.
- The test report.

(1) Strike out what does not apply.
(2) Modified points are underlined for extension.

RDW

THE NETHERLANDS
(NEDERLAND)

E4

JE MAINTIENDRAI

COMMUNICATION

Concerning [1]:

- approval granted
- ~~approval extended~~
- ~~approval refused~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~

of a type of pneumatic tyre for motor vehicles pursuant to Regulation number 30.

Approval number: E4-30R-0279525 **Extension number: 00**

1.	Manufacturer's name or trade mark(s) on the tyre type	:	Bontyre III
2.	Tyre type designation by the manufacturer	:	Stalker A/T
3.	Manufacturer's name and address	:	Shandong New Continent Tire Co., Ltd. Lushan Project Area, Economic Development Zone, Yishui, Shandong, China 276400
4.	If applicable, name and address of the manufacturer's representative	:	not applicable
5.	Summarised description		
5.1.	Tyre size designation	:	225/75R16
5.2.	Category of use	:	~~normal~~/snow/~~special use/temporary use~~ [1]
5.3.	Structure	:	~~diagonal/bias-belted~~/radial/~~run-flat tyre~~[1]
5.4.	Speed category symbol	:	R
5.5.	Load-capacity index	:	108

JE MAINTIENDRAI
RDW

P.O. Box 777
2700 AT Zoetermeer
The Netherlands

Tel. + 31 (0)79 345 83 02
E-mail ttv@rdw.nl
www.rdw.nl

Vehicle Admission & Surveillance

6.	Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity	:	TÜV Rheinland Kraftfahrt GmbH Technologiezentrum Verkehrssicherheit Typprüfstelle Fahrzeuge/Fahrzeugteile Am Grauen Stein D-51105 Köln (Poll)
7.	Date of report issued by that service	:	September 28, 2014
8.	Number of report issued by that service	:	86-R30-2188/14-00
9.	Reason(s) of extension (if applicable)	:	N.A.
10.	Any remarks	:	---
11.	Approval	:	granted/~~extended/refused/withdrawn~~ (1)
12.	Place	:	Zoetermeer
13.	Date	:	07-OCT-2014
14.	Signature	:	L.Vellekoop

15. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.
- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.
- The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
- The test report as mentioned in item 8.

(1) Strike out what does not apply.



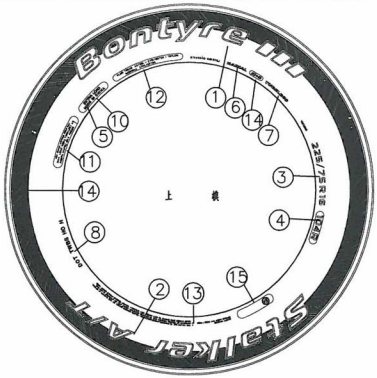

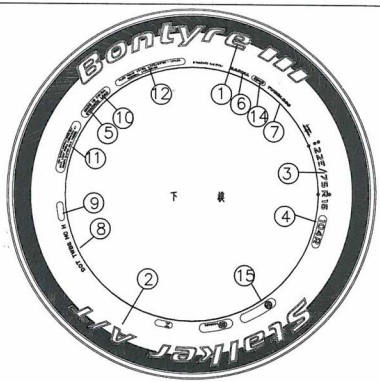



6-TREAD-WEAR INDICATORS EQUALLY SPACED AROUND CIRCUMFERENCE OF TIRE AND MARKED BY "TRIANGLE"

12	PLIES: TREAD 2 POLYESTER + 2 STEEL + 1 NYLON SIDEWALL 2 POLYESTER		
11	U.S.A CANADA AUSTRALIA CODES ONLY MAX.LOAD 1000 kg(2205 LBS) AT MAX.PRESS 340 kPa(50 PSI)		
10	MADE IN CHINA		
9	PRODUCT DATE		
8	DOT ****		
7	TUBELESS		
6	RADIAL		
5	EXTRA LOAD		
4	108R		
3	225/75R16	15	E9 0279525
2	Stalker A/T	14	M+S
1	Bontyre III	13	SAFETY WARNING

RDW

225/75R16	108	R	T/L	744±7	223±9	152	9.7±0.3	2014.08.16
TIRE SIZE	LOAD INDEX	SPEED SYMBOL	TYPE	A (mm)	B (mm)	C (mm)	SKID DEPTH (mm)	DATE

CHECKED BY		APPROVED BY		山东新大陆橡胶科技股份有限公司 SHANDONG NEW CONTINENT TIRE CO.,LTD

Tyre size : **225/75R16**
Manufacturer : **Shandong New Continent Tire Co., Ltd.**

TEST REPORT

according to the ECE-Regulation

Uniform provisions concerning the approval of pneumatic tyres for motor vehicles and their trailers

including all amendments until
... ECE-R30, Amend.02, Suppl. 17...

Approval Status

ECE approval : E4-30R-0279525 Ext.00

Structure of the Test Report

Item No.	
0.	General information
1.	Tested object(s)
2.	Test record
3.	List of appendices
4.	Statement of conformity

The Test Report shall be reproduced and published in full by the client only. It shall however be reproduced partially with the written permission of the Testing Laboratory only.

0. General Information

0.1.	Trade name or mark(s)	:	Bontyre III
0.2.	Tyre type designation(s) by the manufacturer	:	Stalker A/T
0.3.	Tyre size designation	:	225/75R16
0.4.	Manufacturer's name and address	:	Shandong New Continent Tire Co., Ltd. Lushan Project Area, Economic Development Zone, Yishui, Shandong, China 276400
0.5.	No. of the information folder -Date of issue -Date of last change	: : :	n/a August 16, 2014 ---

1. Tested object(s)

1.1.	Object markings		
	Trade name or mark	:	Bontyre III
	Tyre type designation	:	Stalker A/T
	Plies of Tread / Sidewall	:	2 POLYESTER + 2 STEEL + 1 NYLON / 2 POLYESTER
	Tyre size designation	:	225/75R16
	Category of use Indication of category of use	: :	Snow word "M+S"
	Structure indication / symbol of structure	: :	radial word "RADIAL", letter "R" in front of rim diameter marking
	Speed category	:	R
	Load-Capacity Indices(L.I.)	:	108
	Word in case of without inner tube	:	TUBELESS
	Word in case of reinforced tyre	:	EXTRA LOAD
	Date of manufacture	:	3614
1.2	Worst case selection	:	n/a
1.3.	Remarks	:	All versions of the types as stated in the information folder are covered by the tested object(s) respectively.

RDW

2. Test record

2.1. Equipment for measuring and testing : The test facilities / measurement equipment used were in compliance with the test requirements

2.2. Test results

Remarks concerning extension : ~~The type has been tested according to the modification(s) mentioned in appendix 0.~~

~~An actual practical test of the object was not necessary. The results of the previous test(s) are still valid.~~

2.2.1. Dimension measurement according to Annex 6

Measuring rim	:	5.5J x 16						
Inflation pressure after mounting on measuring rim	:	3.0 bar						
Inflation pressure before conditioning	:	2.3 bar						
Conditioning of tyre	:	more than 24 hours						
Inflation pressure after conditioning	:	2.3 bar						
Overall width at six equally spaced points					Height of six equally spaced tread wear indicators			
1.	214.2 mm	4.	213.8 mm		1.	1.7 mm	4.	1.8 mm
2.	214.0 mm	5.	213.8 mm		2.	1.8 mm	5.	1.7 mm
3.	214.4 mm	6.	214.0 mm		3.	1.8 mm	6.	1.8 mm
Max.:	214.4 mm							
Circumference	:	2333 mm						
Outer diameter	:	742.6 mm						
Tread depth / void to fill ratio in case of special use tyre	:	n/a						

2.2.2. Load/speed performance test according to Annex 7

Test machine	:	GX-YLSN-1112
Diameter of test drum	:	1.707 m
Test rim	:	5.5J x 16
Inflation pressure before conditioning	:	3.0 bar
Conditioning of tyre	:	more than 3 hours
Test-room temperature	:	33.7 ~ 34.7 °C
Inflation pressure after conditioning	:	3.0 bar
Circumference before testing	:	2333 mm
Outer diameter	:	742.6 mm

Test load (80%) : 800 kg

Step	Step-Duration [min]	Total Duration [min]	Actual speed (km/h)
1.	10	10	0 –130
2.	10	20	130
3.	10	30	140
4.	10	40	150
5.	20	60	160

Conditioning after testing : more than 6 hours

Circumference after conditioning, after testing : 2336 mm

Outer diameter : 743.6 mm

Difference outer diameter before and after testing (max. 3.5 %) : 1.0 mm
: 0.13 %

Inspection after test : The tyre does not exhibit tread separation, ply separation, cord separation, chunking or broken cords.

2.3. Additional information : The results of the test refer exclusively to the object(s) mentioned under point 1. of this report.

Test site : Shandong New Continent Tire Co., Ltd.
Lushan Project Area, Economic Development Zone,
Yishui, Shandong, China 276400

Test date : Sep. 04, 2014

2.4. Remarks : ---

3. List of Appendices

Appendix 0 : List of modifications

4. Statement of conformity

The above mentioned information folder and the type described in that comply with the requirements mentioned on page 1. The mentioned test results refer to the object(s) described under point 1.1 of this report.

Engineering centre Shanghai, / September 28, 2014
SR / AY

Su Rui
Expert Technical Service

RDW

Tyre size : **225/75R16**
Manufacturer : **Shandong New Continent Tire Co., Ltd.**

List of modifications **Appendix 0**

Correction of : ---

Modification of : ---

Addition of : ---

Deletion of : ---